


MYTHOS STL



D.
DEFINITIVE TECHNOLOGY

High Performance
Floor Standing Speakers

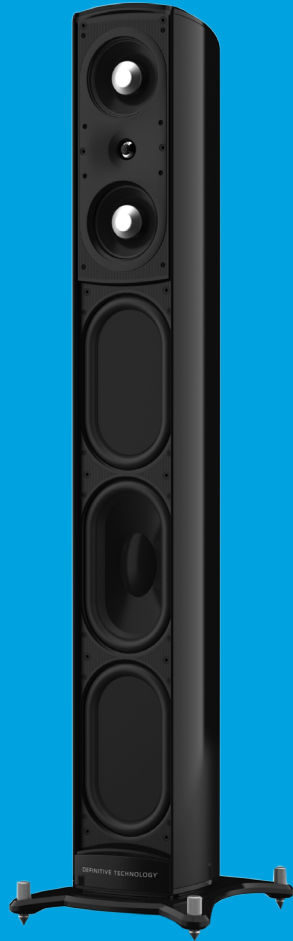

Mythos ST-L represents a major redesign of this consummate Definitive Technology floor standing loudspeaker. Like the original Mythos ST, Mythos ST-L features a built-in powered subwoofer in an elegant extruded aluminum enclosure. But any similarities end there. More than a refinement of the previous model, The Mythos ST-L is a meticulous rethinking of the original high performance super tower. Drivers, tweeter, amplifier and user interface, all have been significantly refined to offer serious audio listeners elegant appearance, greater convenience and exhilarating performance.

High Precision Bass Performance

The built-in subwoofers are an all-new racetrack design, with four times the amplifier power. A Class HD module incorporates a 56-bit micro-processor preamp stage with DSP; this is the same module used in our SuperCube 4000 freestanding subwoofer.

A Remote Control for Greater Control

Mythos ST-L gives the listener more control to achieve sonic perfection. Bass volume level can be changed “on the fly” to adjust for differences in program material, room acoustics and personal taste. LEDs on the logo plate give visual feedback on bass level settings. In addition, each speaker’s bass level can be fine-tuned even more to account for bass volume variations due to the speaker’s position within the room. Mythos ST-L also offers “Stereo Bass” volume control to adjust both speakers simultaneously and a “Low Level” control that engages preset EQ to optimize the sound for low level listening.

Elegant. Refined. Exhilarating.

The extruded enclosure is anodized brushed aluminum (available in Black and Graphite Silver finishes). The base is milled cast aluminum for low center-of-gravity stability and a rich elegant look. Four knurled and threaded shafts at the corners of the base allow the user to easily level and stabilize the speaker on uneven floors. Either carpet spikes or floor glides can be fitted into the leveling shafts.

Audio

- Two 5-1/4" (13.3cm) high-definition cast-aluminum basket polymer midrange drivers. One 1" (25mm) Magnesium/Aluminum alloy dome tweeter. One 6" x 10" (15cm x 25cm) long-throw racetrack active subwoofer driver coupled to two 6" x 10" (15cm x 25cm) long-throw racetrack radiators.

Connections

- Recommended Associated Amplifier: 20 – 350 Watts/channel
- Built-In Subwoofer Power Amplifier: 1200-Watt Class HD amplifier with 56-bit microprocessor Digital Signal Processing (DSP) preamplifier
- Inputs: Bi-wire 5-way bind posts, LFE low level

Dimensions/Usage

- 53" H x 6.75" W x 9.5" D (base 15.625" D)
134.62 cm H x 17.15 cm W x 24.13 cm D