

ACT 4

20-channel HD audio pre-amp processor



The ACT 4 represents a revolution in 3D-audio home cinema processors. Designed to be the heart of a modern UHD home theater, the ACT 4 combines ultimate audio performance, control flexibility, HDMI 2.0b (2.1 ready), with the absolute latest immersive sound technologies. Wrapped in a stunning minimalist design, the ACT 4 meshes the celebrated audio engineering of Acurus with the power of advanced cinema technology—all in perfect harmony.

The ACT 4 also sets a new standard for ease of installation and use. An intuitive, full-color touch-sensitive front panel display simplifies setup and operation. Controllable via 3rd-party systems, the ACT 4 also offers web setup and control which enables operation of an ACT 4 theater from anywhere within the home via mobile device. The ACT 4 has both balanced and unbalanced outputs which allow for flexibility in any application. The ACT 4 supports Acurus' own room correction technology, ASPEQT, an acoustic optimization system which is super-simple to use yet is powerful enough for the most challenging cinema environments.

highlights

- 20-channel processor
- 3rd party controllable
- decodes Dolby Atmos® & DTS:X™
- 5-year warranty
- HDMI 2.0b (2.1 ready)
- upgradeable

applications

- residential home cinema
- multi-purpose
- light commercial
- pro audio


extras

- aux DB9 to XLR cable
- optional rack kit
- made in the USA
- TETRA & MONO cable

ACT 4



20-channel HD audio pre-amp processor

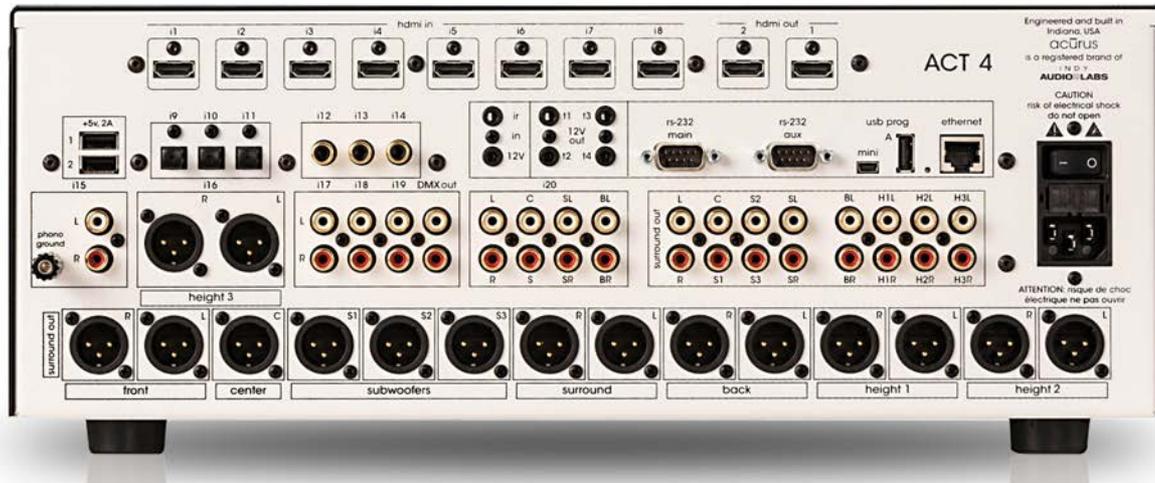

specifications

electrical

frequency response	20 - 20kHz \pm 0.1 dB
SNR	> 110dB (A-wt)
THD	< 0.02% (20 - 20kHz)
max output	3.5V RCA, 7V XLR
power consumption	70W (max), 1W (standby)

decoding and post processing

Dolby Atmos native decoding	Dolby Atmos up to 15.1
DTS:X native decoding	11.1
post processing	Dolby Surround Upmixer, Neural:X upmixer modes
loudspeaker adjust (I)	delay, polarity, large/small, crossover
loudspeaker adjust (II)	PEQ
loudspeaker adjust (III)	ASPEQT Room Correction System

audio/video

stereo analog inputs	3 x gold-plated RCA L/R unbalanced, 1 x XLR L/R balanced
stereo phono input	1 x gold-plated RCA L/R
digital inputs	3 x coax RCA, 3 x optical
multi-channel analog inputs	1 x gold-plated RCA in 7.1 configuration
multi-channel analog outputs	18 x gold-plated RCA, 20 x balanced (16 x XLR + 4 x AUX DB9)
digital video inputs	8 x HDMI 2.0b (2.1 ready), 4k pass-thru
digital video outputs	1 x HDMI 2.0 b (2.1 ready), 1x HDMI 2.0b

accessories and documentation

rack ear kit (ARM-4)
owner's manual
DB-9 to XLR x4 (CAB-20) cable
ethernet and RS232 protocols
2D CAD files
3D CAD files
3rd party control drivers

control

front-panel display	7" LCD touch-panel
serial	2 x DB9, 2-way control, 1 x USB A programming port
ethernet	1 x ethernet, web interface + 2-way IP UDP control
12V trigger and IR	1 x 3.5mm IN, 4 x 3.5mm OUT, IR remote
charging port	2 x USB 5V, 2A

physical

product dimensions	7" x 17" x 15" (17.8cm x 43.2cm x 38.1 cm)
product weight	25 lbs (11.3 kg)
carton dimensions	12" x 22" x 20" (25cm x 56cm x 51cm)
carton weight	30 lbs (13.6 kg)
finish	black satin anodization, laser-etched logo, white chassis

Dolby, Dolby Atmos, Dolby Surround and the double-D symbol are trademarks of Dolby Laboratories. For DTS patents see <http://patents.dts.com>. Manufactured under license from DTS, Inc. DTS, the Symbol DTS:X logo are registered trademarks of DTS, Inc in the United States and/or other countries. ©DTS, Inc. All Rights Reserved