


CinemaX P2

Laser Projection TV*







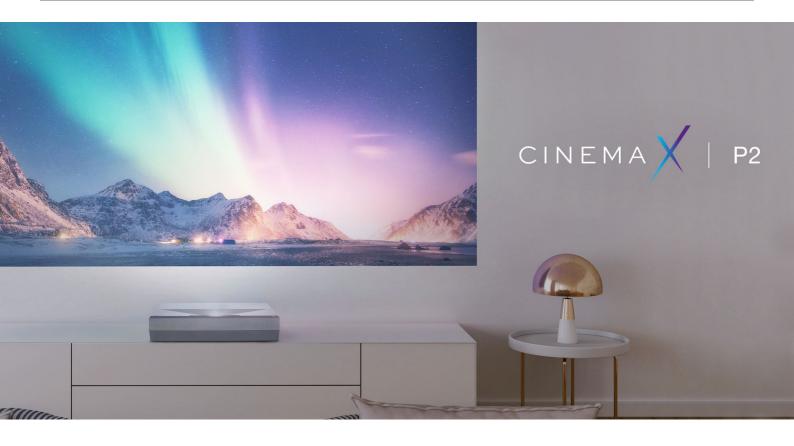

- Ultra short throw laser projector 4K UHD resolution, HDR compatible
- Amazing colour extensive DCI-P3 coverage, 3000 ANSI lumens
- Integrated soundbar Dolby Digital 2.0
- Smart features Apps, voice control, IFTTT

Smart 4K UHD ultra short throw projector

Part of the CinemaX range, this stylish ultra short throw projector delivers an unforgettable 4K UHD digital cinema quality image in the comfort of your own home. Laser technology provides accurate, true to life colour reproduction with extensive DCI-P3 coverage - perfect for recreating the big-screen experience at home.



Specifications

Net weight

Specifications	
Display/image	
Display technology	DLP™
Resolution	UHD (3840x2160)
Brightness	3,000 lumens
Contrast ratio	2,000,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Horizontal scan rate	31 ~ 135Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	90%
Screen size	2.16m ~ 3.05m (85" ~ 120") diagonal
Lamp info	
Light source type	Laser
LASER life	30,000 hours
Optical	
Throw ratio	0.25:1
Projection distance (m)	0.47m - 0.66m
Focal length (mm)	525mm/20.669"
Native offset	124%
Connectivity	
Connections	Inputs 2 x HDMI 2.0, 1 x USB-A reader, 1 x RJ45, 1 x HDMI
	1.4a 3D support
	Outputs 1 x S/PDIF, 1 x USB-A power 1.5A, 1 x Audio 3.5mm
	Control 1 x USB-A service
	Siller FX COD FX CONTO
General	OCAD
Noise level (typical) Noise level (max)	26dB 28dB
PC compatibility	UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA,
PC compatibility	SVGA, VGA, Mac
2D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz),
	1080p(50/60Hz), 2160p(50/60Hz)
3D compatibility	Frame-pack: 1080p24, 720p50 / 60
3D	Full 3D
Security	Kensington Lock, Password protected interface
OSD / display languages	11 languages: English, French, German, Italian, Japanese,
	Portuguese, Russian, Chinese (simplified), Spanish, Chinese
Operating conditions	(traditional) 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
Operating conditions	5 C~40 G/41 F~104 F, max attitude 300000/904311, max humidity 85%
Remote control	Yes
Speaker count	2
Watts per speaker	19W
In the box	AC power cord
	Rechargeable remote control
	Basic user manual
Input lag	67.00ms
Power	
Power supply	100 ~ 240V, 50 ~ 60Hz
Power consumption (standby)	0.5W
Power consumption (min)	220W
Power consumption (max)	345W
Weight and dimensions	576 × 202 × 120
Dimensions (W x D x H) mm	576 x 383 x 130
Gross weight	13.69 kg

11.64 kg

