


# CI-NAP 108

## Product Sheet

The CI-NAP 108 is an exceptional, 8-channel rack-mountable power amplifier. Working in conjunction with the CI-Uniti 102, it facilitates the usage of larger audio zones with multiple speakers whilst staying true to the revered Naim Audio sound. Localised inputs also allow the separation of up to 8 different streams.

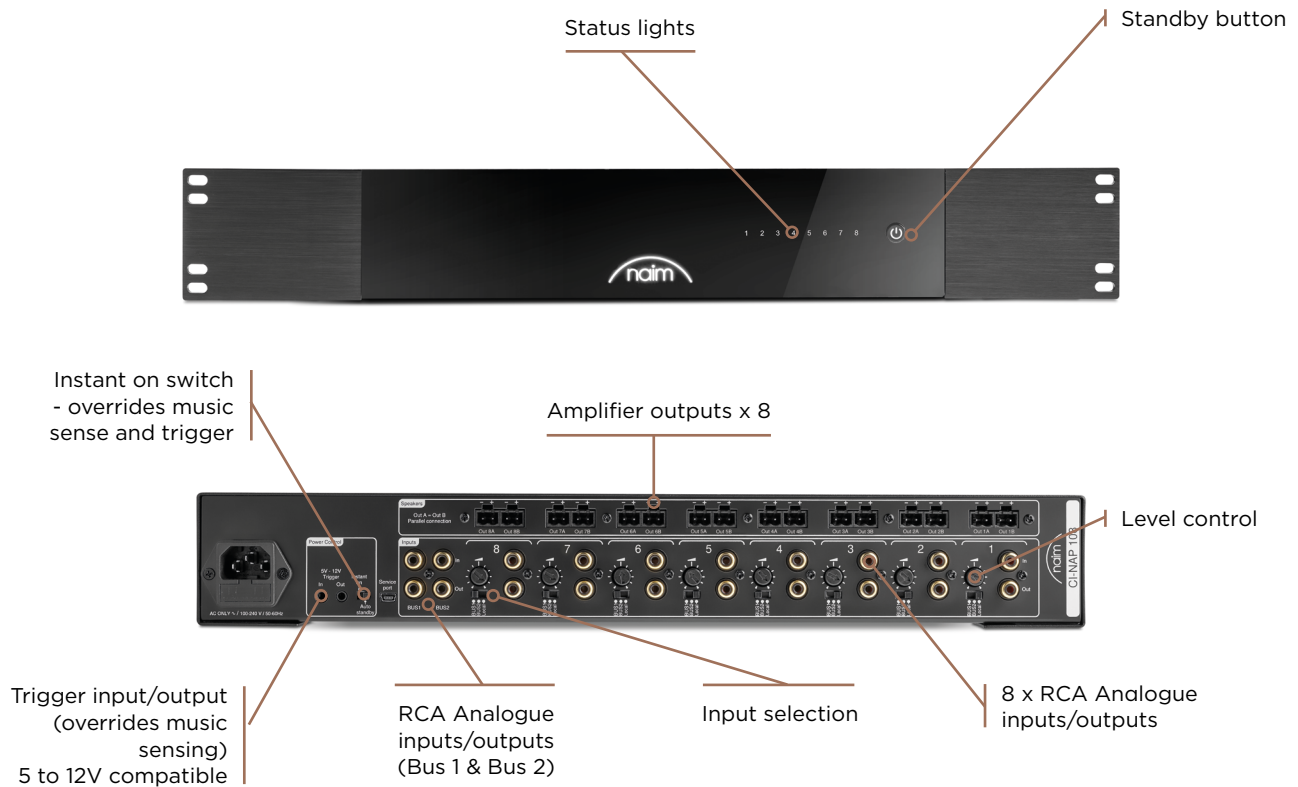

### Key Features

- **10 RCA inputs**, with 8 local inputs and 2 x bus L/R inputs
- **10 RCA outputs** for daisy-chaining to other amplifiers
- **Inbuilt quiet, efficient and compact power amplifier**, capable of driving multiple speakers.
- **Dual Euroblock outputs** for easy parallel speaker connections
- **Independent level control**
- **Temperature-controlled fan**
- **Music sensing** with auto-standby activating after 20 minutes
- **Universal mains power** 100V - 240V
- **0.5W standby**
- **19" rack-mountable**

## Specifications

Type	Amplifier	
Number of channels	8	
Power (Low Impedance)	8Ω	150W
	4Ω	260W
Input connections	Analogue - RCA - (47kΩ)	
Output connections	Line	RCA
	Speakers	Euroblock
Total Harmonic Distortion (THD+N@1kHz)	<0,006%	
Gain	29dB	
Signal-to-noise ratio	105dB (A-Weighted)	
Frequency response (-3dB)	3Hz - 70kHz	
Operating power supply	100V to 240V +/-10%, 50/60Hz	
Wired Automation	12V in/out	
Rack height	1.5U	
BTU	310BTU/hr	
Idle BTU	130BTU/hr	
Standby BTU	1.7BTU/hr	
Dimensions (H x L x D)	2 <sup>5/8</sup> x17 <sup>3/8</sup> x11 <sup>3/4</sup> " (6.66 x 44 x 30cm)	
Weight	15.43lbs (7.7kg)	
Nominal power consumed	340W	
Maximum power consumed	2300W	
Power consumption in standby mode	0.5W	
Operating temperature	5°C to 35°C	
Storage temperature	-20°C to 60°C	

